

SUPROMINITRUCK

ITS MILEAGE AND POWER MAKE IT THE





Specifications

Specifications	Description	Supro Minitruck
ENGINE	Туре	Direct Injection Diesel Engine
	No of cylinders	2
	Displacement Capacity	909 cc
	Maximum Engine Output (Power)	19.2 kW @ 3600 rpm (26 HP)
	Maximum Torque	55 Nm @ 1800 - 2200 rpm
TRANSMISSION	No. of Gears	4 F and 1 R
SUSPENSION	Front	MacPherson Strut with Coil Spring
	Rear	Leaf Spring
BRAKE	Туре	Vacuum Assisted Hydraulic with Auto Adjuste
	Front	Disc
	Rear	Drum
DIMENSIONS	Cargo Box Dimension L X W X H (mm)	2280 X 1540 X 400 (7.5 x 5 ft)
	Wheel Base (mm)	1950
	Min Ground Clearance (mm)	158
	Payload (kg)	850
WHEELS & TYRES	Wheel Rim Size	4J X 12 (30.48 cm)
	Tyre Size	145 R12 (30.48 cm)
SEATING CAPACITY	D+1	







Deep Warm Bl

beep wan


Terms and conditions applied. Dikhai gai accessories standard upkaran ka hissa nahi hai. *VRDe certification ke anusaar standard driving dashaon par nirbha # Warranty- 2 saal ya 60,000km, job hi pehle ho.





Abhindra & Mahindra Ltd., Automotive Sector, Mahindra Towers, 3nd Flore, Aluxii Bead, Kandival (I), Mumhai 400 101 M features and colors mentioned are not available on all models. Accessories shows are not, port of the standard equipment Performance figure may differ in conditions other than test conditions Whitele body color may differ from the printed photographs in view of our policy of continuously improving our products, we reserve the rights to aller specializations or delinger without, printed whose printed that the continuation of the continuation



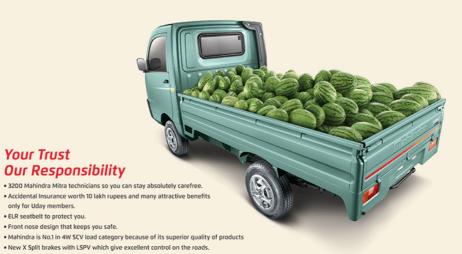

More Savings

- Warranty for 2 years or 60000* km which means less maintenance and more savings.
- Front radiator allows less maintenance of the engine and saves fuel.